



Electrolyte Circulation




Electrolyte Circulation

A membrane pump ensures a permanent electrolyte movement inside the cell. Pumping air into the base of the cell maintains an electrolyte circulation preventing varying temperatures and electrolyte densities throughout the cell.





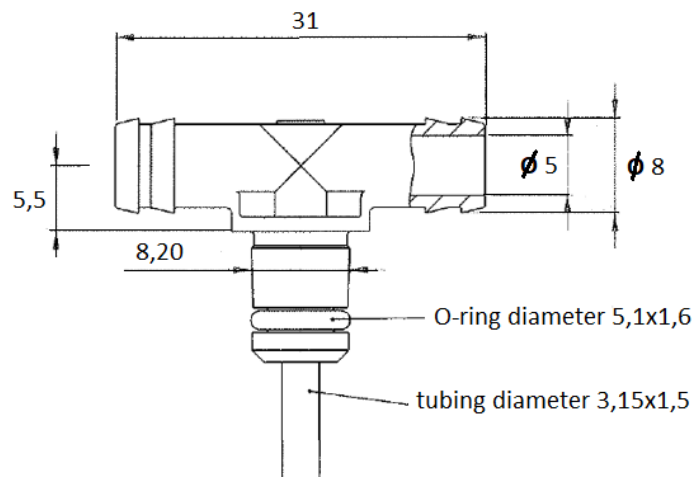

- The sealing grommet is directly injected moulded onto the tube before it is installed in the cell lid.
- Tail ends, corners and T-pieces are put on.
- This system offers you the advantage of reduced storage.
- There are different lengths of tubes. The immersion depth must be at least $\frac{3}{4}$ of the cell height.


Standard Electrolyte Circulation Tubes		
Picture	Ordering code	Description
		
	EUW-TUBE	Electrolyte circulation tube with moulded T-piece - 600 mm <ul style="list-style-type: none"> • Standard length
	Also available in lengths: 550, 470, 420, 385, 330, 265 mm <ul style="list-style-type: none"> • To be ordered per 50 pieces Or the standard length of 600mm can be shortened to the desirable length	
	END6EUW	End piece NW 6 for electrolyte circulation



Electrolyte Circulation Tubes Version R





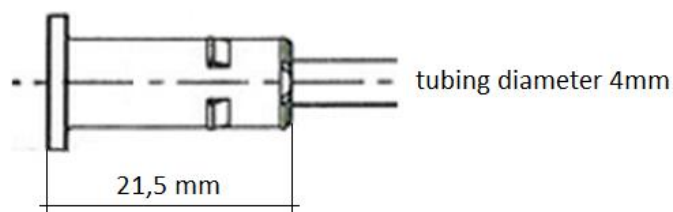


Picture	Ordering code	Description
	EUW-R-640	Electrolyte circulation tube with moulded opening - 640 mm <ul style="list-style-type: none"> • Standard length
		Also available in lengths: 615, 535, 495, 470, 440, 415, 390, 340, 270, 210 mm <ul style="list-style-type: none"> • To be ordered per 50 pieces Or the standard length of 640mm can be shortened to the desirable length
	EUW-E	E-piece for electrolyte circulation – corner <ul style="list-style-type: none"> • Reinforced version (standard)
	END6EUW	End piece NW 6 for electrolyte circulation
	EUW-L	L-piece for electrolyte circulation - end
	EUW-T	T-piece for electrolyte circulation <ul style="list-style-type: none"> • Reinforced version (standard)
	EUW-ADAP	Adapter for electrolyte circulation tube <ul style="list-style-type: none"> • To extend the tube connection by 25 mm







Electrolyte Circulation Tubes Version R-H2

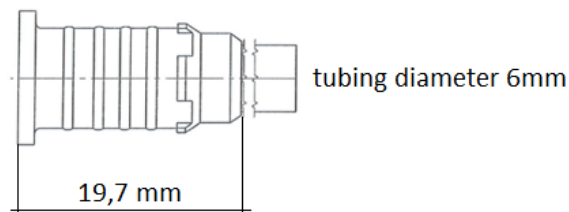

Picture	Ordering code	Description
	EUW-R-H2-680	Electrolyte circulation tube with moulded opening - 680 mm <ul style="list-style-type: none"> • Standard length
		Also available in lengths: 311, 371, 441, 511, 534, 572, 644 mm <ul style="list-style-type: none"> • To be ordered per 50 pieces Or the standard length of 680mm can be shortened to the desirable length
	END6EUW	End piece NW 6 for electrolyte circulation
	EUW-L-H2	E-piece for electrolyte circulation – corner
	EUW-T-H2	T-piece for electrolyte circulation



Electrolyte Accessories		
Picture	Ordering code	Description
	FRSCH06	PVC hose 6 x 1,5 mm
	09BKM6B	Quick coupling female NW6 (Air)
	09BKV6B	Quick coupling male NW6 (Air)
	08KLE6B	Hose clamp NW6 (for 09KUM6B and 09KUV6B)

